

**DA-0101 / DA-0103 DIGITAL AMMETERS**  
**72x72 & 96x48mm SIZES**  
**TRUE RMS**



**DA-0101**  
**1 Phase Current**



**DA-0103**  
**3 Phase Current**



## INTRODUCTION

These state-of-the-art panel meters are designed for accurate measurement of the AC RMS current in single-phase and three-phase systems.

Although they are mainly used in electrical panels, these devices can also be integrated in many other applications.


The current transformer ratio can be set between 5/5A and 5000/5A via front panel buttons.

Devices have separate inputs for supply and measurement.


The **DA-0103** model allows both manual selection of the display channel and automatic scrolling.

## CONNECTION DIAGRAM

DA-0103

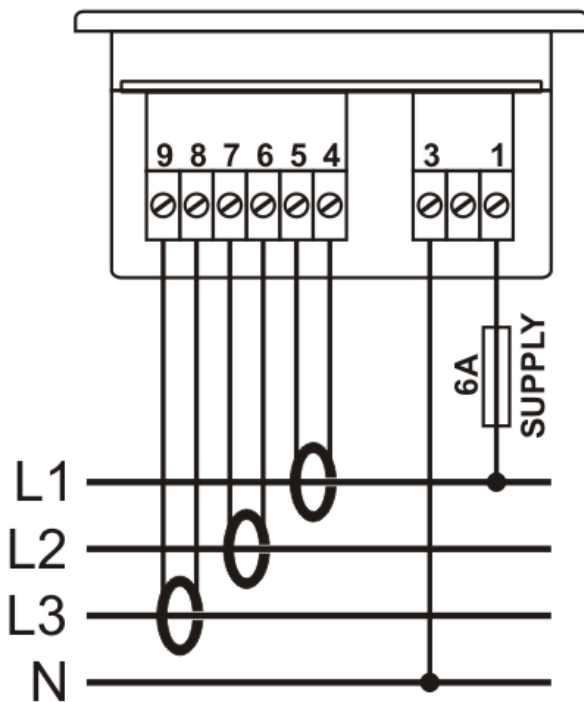


DA-0101

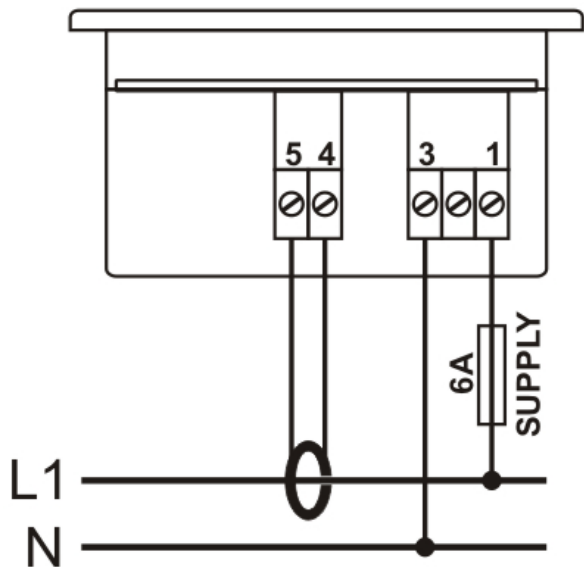

## MOUNTING TOLERANCES

WALL

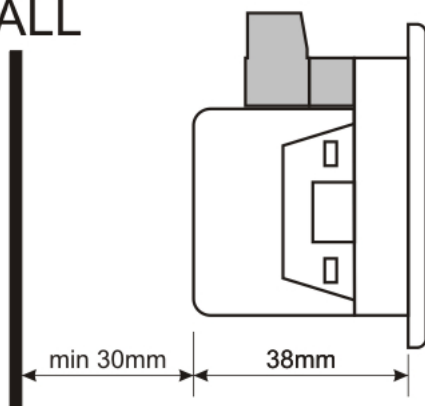

## TECHNICAL SPECIFICATIONS

**Power Supply Input:** 170 - 275VAC  
50 - 60Hz nominal ( $\pm 10\%$ )  
Different AC/DC supply values available.

**Measurement Inputs:**  
0.2 - 5.50 A AC  
30 - 100 Hz

**Accuracy:** 0.5% + 1 digit

**Power Consumption:** < 1.5W

**Burden:** < 1VA per phase

**Operating Temperature:** -40°C ; +80 °C

**Maximum Humidity:** 95% non-condensing.

**Degree of Protection:** IP 54 (Front Panel)  
IP 30 (Back panel)

**Enclosure:**  
Non-flammable, ROHS compliant, high temperature ABS/PC (UL94-V0)

**Installation:**  
Flush mounting with rear retaining brackets

**Dimensions:**  
**96x48 models:** 102x54x41mm (WxHxD)  
**72x72 models:** 78x78x41mm (WxHxD)

**Panel Cutout Dimensions:**  
**96x48 models:** 92x44mm  
**72x72 models:** 68x68mm

**Weight:** 125 gr

**EU Directives Conformity:**  
2006/95/EC (low voltage)  
2004/108/EC (EMC)

**Norms of reference:**  
EN 61010 (safety requirements)  
EN 61326 (EMC requirements)

## PACKAGING INFORMATION

**Pieces per Package:** 24 Pcs

**Package Size:** 280 x 170 x 215mm (LxWxH)

**Package Weight:** 3.2 kg

**DATAKOM Electronics Limited**

Tel : +90-216-466 84 60

Fax : +90-216-364 65 65

e-mail : [datakom@datakom.com.tr](mailto:datakom@datakom.com.tr)

http : [www.datakom.com.tr](http://www.datakom.com.tr)

